

## Sensor operated 2 brush sole washer



Automatically detects the passage of the user at each end of the machine via infra-red sensor.


- Designed for continuous passage: the unit can be installed in a location making its use mandatory
- Clean soles by the action of horizontal rotating brushes and water-detergent mixture
- Dismantled easily without tools for easy cleaning of the brushes and housing
- Supplied with a venturi metering system for accurate dosing of the detergent

### Additional options \*

- Stainless steel gate 304 (see page 4.16)
- \* Please specify when ordering

Réf. SC01144

### Dimensional Drawings.

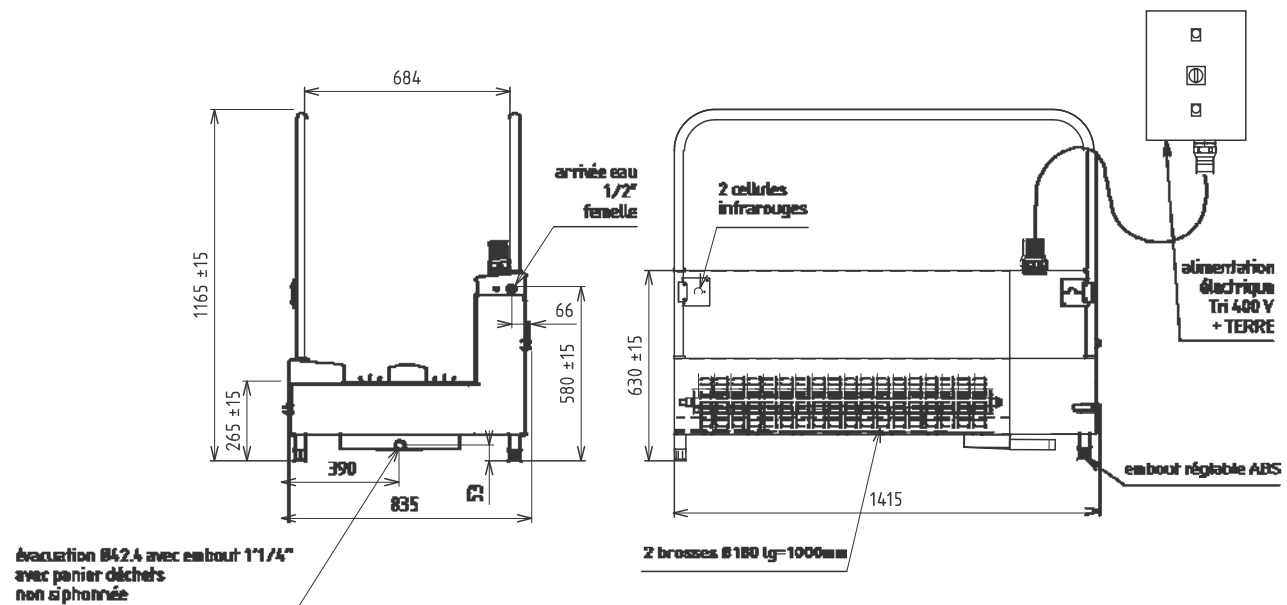

### Specifications

- 304 stainless steel construction
- Bead blasted finish
- 2 horizontal rotating brushes
- Adjustable dosing system: 0.2 to 9.3%
- Foot print dimensions: 835 mm x 1415
- Evacuation non siphoned basket with waste

### Water supply

- Recommended pressure: 3 bars
- Maximum temperature: 50 ° C
- Water flow rate: 7 l / min

### Power

- 3 phase 400V + earth - 50 Hz - Power 0.80 kilowatts
- Connection to terminal block in the cabinet
- Control panel polyester wall mount